


BAUDOUIN DIESEL GENERATOR SET

MB20

20 kVA

INDUSTRIAL GENERATOR

Reliable diesel generating set configured for prime, standby and project-specific industrial power applications.

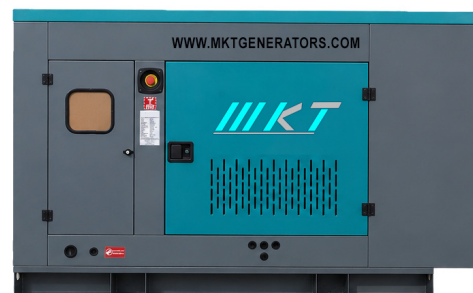

STANDBY POWER

20 kVA

PRIME POWER

18.0 kVA

ENGINE MODEL

4M06G20-5

FREQUENCY

50 Hz

GENERATOR OUTPUT

Standby Power	20 kVA
Prime Power	18.0 kVA
Standby Output	16.0 kW
Prime Output	14.0 kW
Frequency	50 Hz
Voltage	400 V
Phases	3
Power Factor	0.8

ENGINE

Engine Brand	Baudouin
Engine Model	4M06G20-5
Cylinders	4 Inline
Displacement	2.3 L
Air Intake	Naturally Aspirated
Speed	1500 rpm
Governor System	Electronic
Cooling System	Water Cooling

TECHNICAL SPECIFICATIONS

Published product data for the selected generator model. Final component selection is confirmed with the commercial offer.

ALTERNATOR & CONTROL

Alternator	MKT / Stamford / Leroy Somer
Controller	Deep Sea Controller
Voltage Regulation	±1%
Insulation Class	H
Protection Standard	IP23
Generator Type	Silent / Open

FUEL SYSTEM

Fuel Type	Euro Diesel
100% Load	4.8 L/h
75% Load	3.7 L/h
50% Load	2.6 L/h
Canopy Fuel Tank	115 L
Open Fuel Tank	115 L

DIMENSIONS & WEIGHT

Canopy Dimensions	2000 x 900 x 1310 mm
Canopy Weight	790 kg
Open Dimensions	1650 x 900 x 1460 mm
Open Weight	658 kg

AVAILABLE PROJECT OPTIONS

- 50 Hz and 60 Hz configurations
- Silent canopy or open-frame execution
- Deep Sea, ComAp or SmartGen control solutions
- ATS, synchronization and remote monitoring systems
- Custom voltage, fuel tank and enclosure requirements