


CUMMINS DIESEL GENERATOR SET

MC200

200 kVA

INDUSTRIAL GENERATOR

Reliable diesel generating set configured for prime, standby and project-specific industrial power applications.

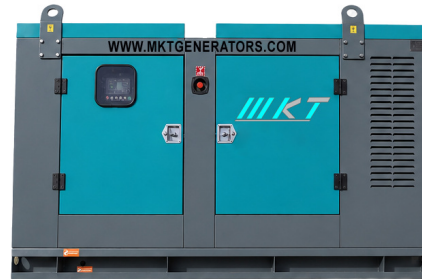

STANDBY POWER

200 kVA

PRIME POWER

182.0 kVA

ENGINE MODEL

6CTA8.3-G2

FREQUENCY

50 Hz

GENERATOR OUTPUT

Standby Power	200 kVA
Prime Power	182.0 kVA
Standby Output	160.0 kW
Prime Output	146.0 kW
Frequency	50 Hz
Voltage	400 V
Phases	3
Power Factor	0.8

ENGINE

Engine Brand	Cummins
Engine Model	6CTA8.3-G2
Cylinders	6 Inline
Displacement	8.3 L
Air Intake	Turbocharged & Aftercolled
Speed	1500 rpm
Governor System	Electronic
Cooling System	Water Cooling

TECHNICAL SPECIFICATIONS

Published product data for the selected generator model. Final component selection is confirmed with the commercial offer.

ALTERNATOR & CONTROL

Alternator	MKT / Stamford / Leroy Somer
Controller	Deep Sea Controller
Voltage Regulation	±1%
Insulation Class	H
Protection Standard	IP23
Generator Type	Silent / Open

FUEL SYSTEM

Fuel Type	Euro Diesel
100% Load	44.0 L/h
75% Load	33.0 L/h
50% Load	23.0 L/h
Canopy Fuel Tank	220 L
Open Fuel Tank	220 L

DIMENSIONS & WEIGHT

Canopy Dimensions	3150 x 1000 x 1810 mm
Canopy Weight	1950 kg
Open Dimensions	2550 x 1000 x 1900 mm
Open Weight	1670 kg

AVAILABLE PROJECT OPTIONS

- 50 Hz and 60 Hz configurations
- Silent canopy or open-frame execution
- Deep Sea, ComAp or SmartGen control solutions
- ATS, synchronization and remote monitoring systems
- Custom voltage, fuel tank and enclosure requirements